

Nachdruck und Vervielfältigungen jeder Art, auch auszugsweise, sind ohne schriftliche Genehmigung untersagt. Copyright © 1997-2019, by Bernd Jacobi - Multipick

Unauthorized Copying, Reproduction or Republishing any of the material without written consent is strictly prohibited. Copyright © 1997-2019, by Bernd Jacobi - Multipick

Reproductions de toutes sortes, y compris des extraits, sont interdites sans accord par écrit. Copyright © 1997-2019, by Bernd Jacobi - Multipick

Queda totalmente prohibida la copia de gráficos y textos sin autorización. Copyright © 1997-2019, by Bernd Jacobi - Multipick

Senza l'autorizzazione per iscritto, sono proibite qualsiasi ristampe, riproduzioni o duplicati anche per estratto. Copyright © 1997-2019, presso Bernd Jacobi - Multipick

Przedrukowywanie i kopiowanie całości bądź fragmentów bez pisemnej zgody zabronione. Copyright © 1997-2019, by Bernd Jacobi - Multipick

[multipick.com](http://multipick.com)

## Lockoff - Door Spy Opener


Before use, please inquire what kind of handle is used on the inside of the door. If rotary handles are used or the handle is mounted in an upward direction unfortunately even this tool is inefficient.

A mounted door spy can easily be broken using e.g. a screw driver. Then simply insert the door spy remover. The mobile tip locks into the grooves on the back of the door spy. It can then be turned out of its hole easily. Alternatively the door spy can also be removed from the outside using the special pliers for the removal of the door spy. Be careful though! In case the pliers slip off, this may cause ugly scratches on the surface of the door.

However you may solve the problem in a more elegant way with our Lockoff - Door Spy Turbo-Assistant. This genius and simple tool removes easily all common door spies without any damage. Simply fix to a drilling machine or to a screwdriver and unscrew the door spy with the necessary pressure.

Before using the tool, the length of the lever has to be adjusted. This means it must be adjusted to the distance between the door spy and the handle and then securing it with the included screw driver.



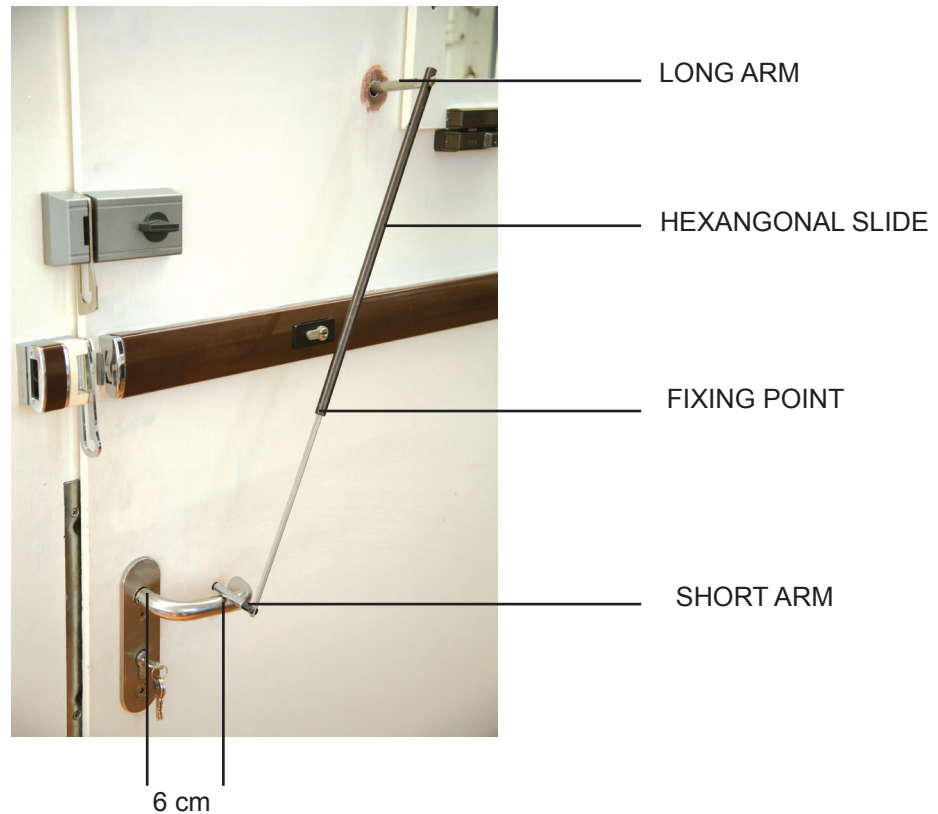

The distance between the short arm on the extendable end of the long hexagonal slide and the axis of the door knob must be set to 6cm. As shown in picture above.

The adjusting of the lever to the appropriate length is very important. If the arm of the lever that exerts pressure on the handle is too short, it may slip off before having pushed down the handle far enough to open the door. If it is too long it may not be possible to exert sufficient pressure. If a wrong length of the lever was chosen, the "Lockoff" can be pulled out and be easily adjusted anew.

The LOCK OFF is inserted into the door spy hole short arm first. Then it is fed the rest of way through until just the first joint in the long arm is through and the second joint on the long arm remains on your side of the door. Sideway view: The angled lever (short arm) rests on the inward door handle. By turning the outer lever (remaining part of the long arm) to the left or right the inner (short) arm will push down the handle with a "lever" action.

Note: The outer lever will not turn in full circles. You must turn/push it approximately  $\frac{1}{4}$  of a full turn (give or take) in the desired direction.

